

श्री कर्ण नरेन्द्र कृषि महाविद्यालय, जोबनेर

पशुधन उत्पादन प्रबंधन, श्री कर्ण नरेन्द्र कृषि महाविद्यालय, जोबनेर सीमित निविदा सुचना क्रमांक F.()/Tender/SKNCOA/LPM/2025/370 date 14.08.2025 के तहत प्राप्त सफल एकल सीमित निविदा की दर प्राप्त हुई है, जो कि नीचे तुलनात्मक तालिका में दर्शाई गई है।

S. No.	विवरण	M/s Narayan Lal Kumawat Contractor, Baberwal Ki Dhani, Jobner, JAIPUR, RAJASTHAN Mob. No.- 9414820656		
	Particulars	Quantity	Rate	Amount
1.	Demolishing brick work manually/ by mechanical means including stacking of serviceable material and disposal of unserviceable material within 50 metres lead as per direction of Engineer-in-charge. In cement mortar.	2.05 Cum	540.00 P. Cum	1107.00
2.	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) finished with a floating coat of neat cement including cement slurry, making of lines or groove etc complete but excluding the cost of nosing of steps etc. complete. 75mm thick with 20mm thick nominal size aggregate.	13.00 Sqm	460.00 P. Sqm	5980.00
3.	Supply and installation of Multi Rib Proofing/cladding Sheet Manufacture out of 0.50mm TCT (Total Coated Thickness) high tensile Zinc aluminum alloy coated galvalume steel (as per 150gsm zinc aluminum coated 550Mpa tensile strength) confirming to IS: 1397/astm A-792 sheet to have wide pens 30mm high NB at 250 centre and centre width of 1020mm sheets be casted with regular modified polyster system on a continuous with line on centre for face and with a polyster coating respectively sheet shall have proportionality with siphoned plate made to prevent leakage sheet shall be fixed by more of self drilling lift tapping hot dip zinc coated hex head fastener of size 12x14x55mm long. The sheet shall be supplied in cost one length and for a minimum up to 12mts with all scaffolding. Add extra for 0.60mm TCT (Total Coated Thickness) high tensile Zinc aluminum alloy coated galvalume steel sheet in place of 0.50mm thick	170.00 Sqm	798.00 P.Sqm	135660.00
4.	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade : Two or more coats on new work	30.00 Sqm	75.00 P. Sqm	2250.00
5.	Providing & fixing UV stabilized fiberglass reinforced plastic sheet roofing upto any pitch including fixing with polymer coated „J” or „L” hooks, bolts & nuts 8mm dia. G.I plain/bitumen washers complete but excluding the cost of purlins, rafters, trusses etc. The sheets shall be manufactured out of 2400 TEX panel roving incorporating minimum 0.3% Ultra-violet stabiliser in resin system under approximately 2400 psi and hot cured. They shall be of uniform pigmentation and thickness without air pockets and shall conform to IS 10192 and IS 12866. The sheets shall be opaque or translucent, clear or pigmented, textured or smooth as specified. 3.0mm thick (Wt. 5.0 Kg./Mtr. Sq.)	13.00 Sqm	1235.00 P. Sqm	16055.00

नरेंद्र कर्ण
26-8-25

AS

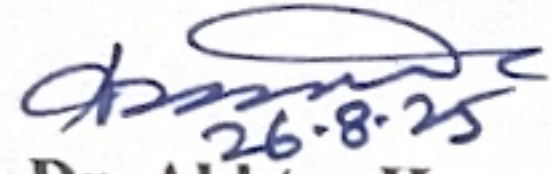
AS

26/8/25

AS

6.	Steel work in built up tubular trusses including cutting, hoisting (height upto 10 m)fixing in position and applying a priming coat of approved steel primer, welded and bolted including special shaped washers etc. complete. Hot finished welded type tubes.	400.00 Kg	105.00 P. Kg	42000.00
G.Total=				203052.00

उपापन समिति द्वारा वित्तिय सीमित निविदा दिनांक 26.08.2025 को खोली गई जिसमे जो दर प्राप्त हुई है। वह उपापन समिति को बाजार भाव से दरें अधिक प्रतीत होने के कारण फर्म से दर पर बातचीत (नेगोशियसन) करने की अनुशंसा करती हैं।

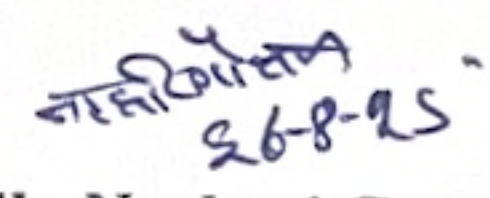

26-8-25
Dr. Akhter Hussain
Convener

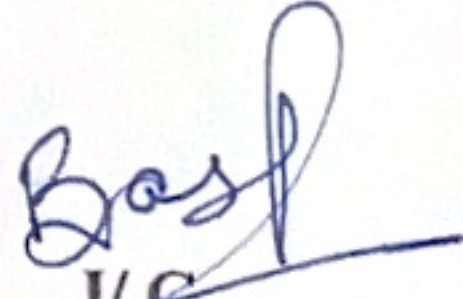
—
Dr. R.P Ghasolia
Member


Dr. Rajesh Singh
Member


Sh. D. K. Verma
Member


26/8/25
Sh. Hem Singh
Shekhawat
S.O. Accounts


26-8-25
Sh. Narhari Gautam
EO/Nominee


I/e
LPM

Approved as
prepared
18/8/25
DEAN